

???????



????????????????????????????????????

Rating: Not Rated Yet

Price:

Variant price modifier:

Base price with tax:

Price with discount:

Salesprice with discount:

Sales price:

Sales price without tax:

Discount:

Tax amount:

[Ask a question about this product](#)

Manufacturer: [???????](#)

Description



??8????????????????

????

?:??“?”??

??“?”??“PLUS”????

????????????????“????”??

?????????20?150mm????????????????????????????????

AUTOSAT??

?????????4?AUTOSAT

????

????



????

????“????”??
??—????????

????“????”??
??—????????

AUTOSAT???????????

??

??????????

??

???

???

????“PLUS”

??
??

????

?????????“????”??

????????????240mm

????????????350mm



??????????????

????

????????????????????????????????????

??????

技术特点		SAT										
		mm	mm	mm	mm	mm	mm	mm	mm	mm	inch	inch
托盘尺寸 (P=深度/F=叉车边)		u.m.	800(P)X1200(F)	1000(P)X1000(F)	1000(P)X1200(F)	1100(P)X1100(F)	1100(P)X1200(F)	1165(P)X1165(F)	1200(P)X1200(F)	1200(P)X1000(F)	48(P)X40(F)	40(P)X48(F)
识别	型号		SAT.0812	SAT.1010	SAT.1012	SAT.1111	SAT.1112	SAT.1165	SAT.1212	SAT.1210	SAT.4840	SAT.4048
	电源		电力	电力	电力	电力	电力	电力	电力	电力	电力	电力
	操作员位置		手动	手动	手动	手动	手动	手动	手动	手动	手动	手动
	载重量	kg	1500	1500	1500	1500	1500	1500	1500	1500	1500	1500
	温度范围 ST/BZ	° C	+45/-30	+45/-30	+45/-30	+45/-30	+45/-30	+45/-30	+45/-30	+45/-30	+45/-30	+45/-30
车轮	设备重量	kg	220	230	230	230	230	230	230	230	230	230
	空转轮		聚氨酯	聚氨酯	聚氨酯	聚氨酯	聚氨酯	聚氨酯	聚氨酯	聚氨酯	聚氨酯	聚氨酯
	车轮尺寸 前轮/后轮	mm	120	120	120	120	120	120	120	120	120	120
	驱动轮数量	nr	2	2	2	2	2	2	2	2	2	2
尺寸	L1 总长 (参考技术图纸)	mm	884	1084	1084	1184	1184	1249	1304	1304	1304	1084
	L2 总长 (参考技术图纸)	mm	947	820	947	820	947	947	947	820	820	947
	L3 总长 (参考技术图纸)	mm	175	175	175	175	175	175	175	175	175	175
性能	起升行程	mm	45	45	45	45	45	45	45	45	45	45
	装载/卸载运行速度	m/min	35/70	35/70	35/70	35/70	35/70	35/70	35/70	35/70	35/70	35/70
	起升速度	s	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
	下降速度	s	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
	运行电机功率	W	600	600	600	600	600	600	600	600	600	600
电机和电池充电器	起升电机功率	W	540	540	540	540	540	540	540	540	540	540
	电池类型		Litio	Litio	Litio	Litio	Litio	Litio	Litio	Litio	Litio	Litio
	电池重量	kg	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5
	电池尺寸 (宽、长、高)	mm	175x325x150	175x325x150	175x325x150	175x325x150	175x325x150	175x325x150	175x325x150	175x325x150	175x325x150	175x325x150
	电池容量	Ah	20	20	20	20	20	20	20	20	20	20
	电池电压	V	48	48	48	48	48	48	48	48	48	48
	ST 型号的电池工作时间范围	h	8/10	8/10	8/10	8/10	8/10	8/10	8/10	8/10	8/10	8/10
	BZ 型号的电池工作时间	h	6	6	6	6	6	6	6	6	6	6
	充电至 100%所需时间	h	5	5	5	5	5	5	5	5	5	5
	电池充电电流	Ah	12	12	12	12	12	12	12	12	12	12
其它	电池寿命	年	>5	>5	>5	>5	>5	>5	>5	>5	>5	>5
	电机控制类型		DC	DC	DC	DC	DC	DC	DC	DC	DC	DC
	针对驾驶员的噪声级别	分贝 (A)	<60	<60	<60	<60	<60	<60	<60	<60	<60	<60
	频率	MHz	433	433	433	433	433	433	433	433	433	433
遥控器	电源		可充电电池	可充电电池	可充电电池	可充电电池	可充电电池	可充电电池	可充电电池	可充电电池	可充电电池	可充电电池
	保护		IP65	IP65	IP65	IP65	IP65	IP65	IP65	IP65	IP65	IP65
	显示		Led	Led	Led	Led	Led	Led	Led	Led	Led	Led
	温度范围 ST/BZ	° C	+45/-30	+45/-30	+45/-30	+45/-30	+45/-30	+45/-30	+45/-30	+45/-30	+45/-30	+45/-30
	语言		意大利语/英语/西班牙语/法语/德语/捷克语/波兰语/俄语/中文/韩语/其他语言致函索取									

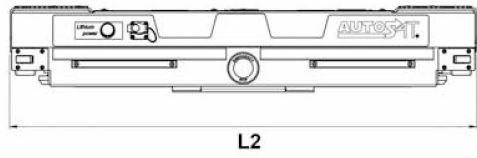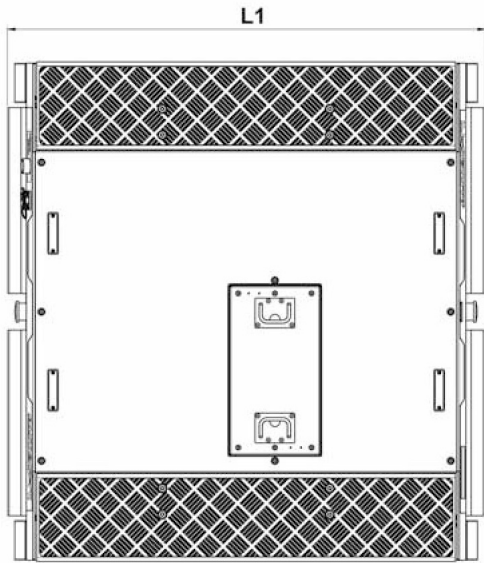

[????????????????????](#)

[????????????????????](#)

[????????|????|????](#)

Reviews

There are yet no reviews for this product.